



▼ Solution:

Surge level:

IEC61000-4-5

1.2/50 μ s-8/20 μ s:

CM/DM 4KV 3KA

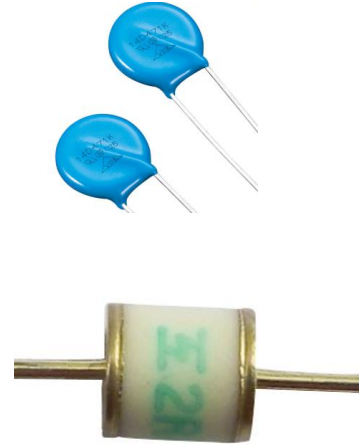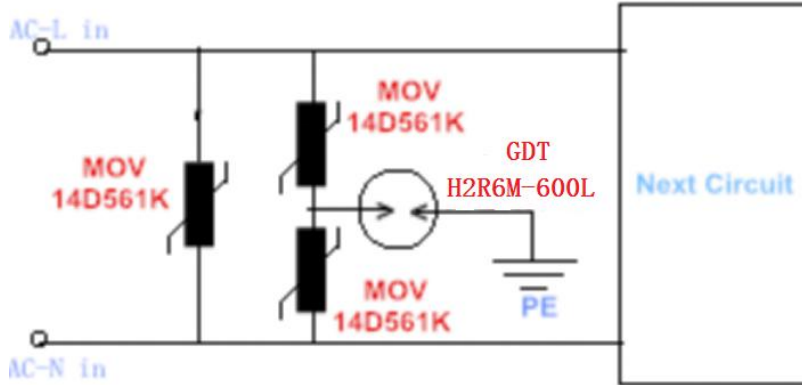

Specification.....

Part Number	DC Spark-over Voltage @ 100V/S	Impulse Spark-over Voltage @100V/ μ s	Impulse Spark-over Voltage @1KV/ μ s	Insulation Resistance	Impulse discharge current(8/20 μ s)	AC discharge current (50Hz, 1s, 10ti mes)	Capacitance (1MHz)
GDT	V	V	V	G Ω	10 Times	A	PF
H2R6M-600L	600 \pm 20%	<1000	\leq 1100	>1	5KA	5	\leq 1

Part Number	Varistor Voltage @1mA	Withstanding surge current 8/20 μ s	Maximum Clamping Voltage
MOV	V	A	V
14D561K	504-616	4500	925

Application product(AC 220V Power , LED Power....etc):



Statement: These solution is only for reference, The final solution will be based on the actual test results, HUAAN LIMITED will have the right of final explanation.

sales@huaandz.com

abc0734@126.com